


8 7 6 5 4 3 2 1

REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	

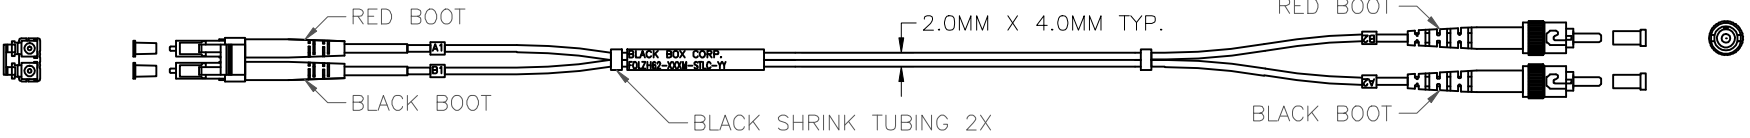

OPTICAL TEST DATA @ 1300NM	
INSERTION LOSS	MAX .75dB
BACK REFLECTION	MIN 20dB
NUMERICAL APERTURE	.278 +/- 0.015
FERRULE COMPRESSION	7.8N TO 11.8N
OM1 62.5µ	CORNING INFINICOR 300
ATTENUATION	3.5dB/KM @ 850NM
	1.5dB/KM @ 1300NM
BANDWIDTH	220Mhz/KM
LINK LENGTH (10GB/S)	33 METERS

YY = AVAILABLE COLOURS	
BL	BLUE
OR	ORANGE
GN	GREEN
BR	BROWN
GR	GREY
WH	WHITE
RD	RED
BK	BLACK
YL	YELLOW
VT	VIOLET
PK	PINK
AQ	AQUA

NOTE:	
1	DUPLEX ZIP PATCH CORD
2	LOW-SMOKE, ZERO-HALOGEN
3	STANDARD BLACK BOX LENGTH TOLERANCE
4	CHANNEL MARKERS AND COLOR CODED BOOTS
5	TEST RESULTS SUPPLIED WITH EACH ASSEMBLY
6	PACKAGED INDIVIDUALLY
7	12 COLORS AVAILABLE
8	ROHS COMPLIANT
9	XXX = LENGTH IN METERS
10	YY = COLOR OF JACKET

BLACK BOX LENGTH TOLERANCE		
0 TO 3 METERS	-0	+7.6 CM
3 TO 30.5 METERS	-0	+15.2 CM
30.5 METERS OR MORE	-0	+30.48 CM

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±



NAME		DATE	TITLE:
DRAWN	JOSHW	12/01/2016	ST - LC FIBER OPTIC PATCH CORD
ENG APPR.	STEVEN	12/01/2016	
CHECKED	STEVEN	12/01/2016	
COMMENTS:			
SIZE	DWG. NO.	REV	
B	FOLZH62-XXM-STLC-YY	A	
SCALE: 1:1		SHEET 1 OF 1	

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
© Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL:
FINISH:
DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1